


Original Operating Manual:

Photoelectric proximity switch IRS/IRN/IRD-***-FXC/XCI(-OP)

IRD-***-FXC/XCI-OP

Housing M30

IRN-***-FXC/XCI-OP




- Also for using with certificated fibre optics
- Types IRD: ATEX and IECEx certificated
- Types IRD: For use in Ex Zones (0), 1, 2, (20), 21, 22 optical radiation can operate into Ex Zones 0, 20
- Types IRN: For use in Ex Zones (1), 2, (21), 22 optical radiation can operate into Ex Zones 1, 21
- Robust sensor for industrial applications



ATEX designation: II 3(2)G Ex nA [op is Gb] IIB T4 Gc, II 3(2)D Ex tc [op is Db] IIIA T135°C Dc IP67


Type	IRS-***-FXC	IRN-***-FXC-OP	IRD-***-FXC-OP
Technical data	***= Range in dm, 005/010/015/020/030: 0.5m, 1m, 1.5m, 2m, 3m		
Type of Ex protection Gas, according to 2014/34/EU	NONE	II 3(2)G Ex nA [op is Gb] IIB T4 Gc	II 2(1)G Ex d [op is Ga] IIC T6 Gb
Type of Ex protection Dust, according to 2014/34/EU	NONE	II 3(2)D Ex tc [op is Db] IIIA T135°C Dc IP67	II 2(1)D Ex tb [op is Da] IIIC T100°C Db IP67
For use in Ex Zones	NONE	Zones (1), 2, and (21), 22	Zones (0), 1, 2 and (20), 21, 22
Range, on white paper A4/1m ² , 80g	0.5m to 3m (Designation 005, 010, 015, 020, 030)		
Light source	Infrared 870nm		
Optical angle	approx. 10°		
Maximum optical radiant power	NOT LIMITED	<=35mW	<=15mW
Maximum radiant power	NOT LIMITED	<=5mW/mm ²	<=5mW/mm ²
Response time	5ms (faster response time, on request)		
Power up delay time	500ms		
Supply voltage	24VDC +-10%, Um = maximum 30VDC		
Intrinsic current consumption	max. 60mA		
Maximum power dissipation	1.68W		
Output and control-output	PNP type, 100mA, short-circuit protected		
Disable-Input, only types IR*-***-XCI(-OP)	PNP compatible, Ri 10kΩ		
Housing	M30, brass Ms 58, nickel plated (optional stainless steel 1.4404, types: IR*-***-***(-OP)-S224) (optional stainless steel type 316ss, types: IR*-***-***(-OP)-S316)		
Enclosure rating, according to EN 60529	IP 65	IP 67	IP67
Ambient working temperature range Tamb	-20°C up to +50°C		
Storage temperature range	-20°C ... +70°C		
Relative humidity	15% ... 80%		
Vibration and shock resistance	Vibration: 30g over 20Hz to 2kHz. Shock: 100g for 3ms		
Pollution degree, according to EN 60664-1:2007	4		
Device designation, according to EN 60947-5-2	R3A30AP1		
Connection cable	4+PE x 0.5mm ² TPU, shielded, leads numbering marked, oil resistant cable for trailing, L: 3m		
Connection cable, types IR*-***-XCI(-OP)	5+PE x 0.5mm ² TPU, shielded, leads numbering marked, oil resistant cable for trailing, L: 3m or 6+PE x 0.5mm ² PVC, shielded, leads numbering marked, Length: 3m		
Socket, IRS/IRN-***-FXC(-OP)-S099	Socket M12, Lumberg RSFM 5, 5-leads		
Accessories, all devices	- 2x nuts M30 (or 1 clamp on demand)		
Accessories, only IRD/IRN-***-FXC/XCI-OP	- 1x Spare safety screw with packing ring for potentiometer sealing		
Accessories, only IRN-***-FXC-OP-S099	- 1x Safety lock device, mount at the cable connection, for locking the connection - 1x Warning plate "Do not open/close when supply voltage connected" - 1x Protection cap for the sensor socket		
Accessories, not included, only IRS/IRN-***-S099	- Single ended cordset, types RKT5 5-298/xx or RKWTH 5-298/xx, Lumberg		
Options	- Cable length: Up to maximum 100m. Designation: IR*-***-FXC(-OP)/K:100m - IR*-***-XCI(-OP): With emitter disable input (DI), not for ***-S099 - IRS/IRN-***-FXC(-OP)-S099: Socket M12: Lumberg RSFM-5, 5 terminals - IRD-005-FXC-OP-1kHz-S149: Cable TPU, for trailing, length: 5m, switching frequency: 1kHz - IRD-010-FXC-OP-S149: Cable TPU, for trailing, length: 5m - IRD-010-FXC-OP-S224: Housing stainless steel 1.4404 / 316L - IR*-***-FXC(-OP)-S272: 2kHz switching frequency, without 3-color LED and control-output - IR*-005-FXC(-OP)-S273: 5kHz switching frequency, without 3-color LED and control-output - IRS-005/010-FXC-MT3/FT3: External multi-turn (MT3) or single-turn (ST3) potentiometer for adjustment at separate shielded cable, length: 3m - IR*-***-FXC/XCI-OP-S316: Housing stainless steel type 316ss - IRS-***-FXC/XCI-OP-S107: Max. Temp. Ambient 80°C		
Function and LED indication			
Function at standard connection of the supply voltage:			
Function on reversed polarity of the supply voltage:			
LED indication and output function: (Versions with switching frequency 2kHz and 5kHz, without control-output. LED shows only red or off).			

Dimensions and wiring
IRN/IRD-***-FXC/XCI-OP:

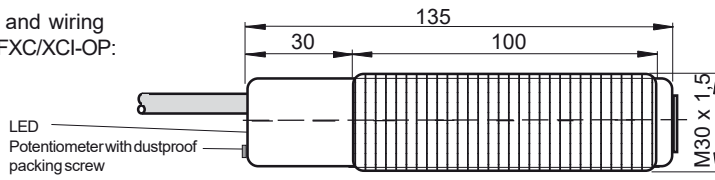


	IRN/IRD-***-FXC	IRN/IRD-***-XCI
+24VDC	1	1
0V	2	2
Output	3	3
Control out	4	4
DI	--	5
FE	yellow-green	yellow-green

Dimensions and wiring

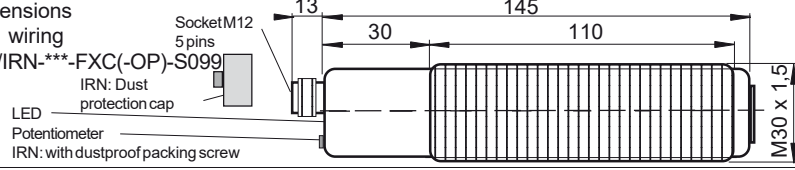

	IR*-***-FXC(-OP)-S099
+24VDC	1 brown
Control out	2 white
0V	3 blue
Output	4 black
FE	5 grey


Dimensions and wiring
IRS-***-FXC/XCI:

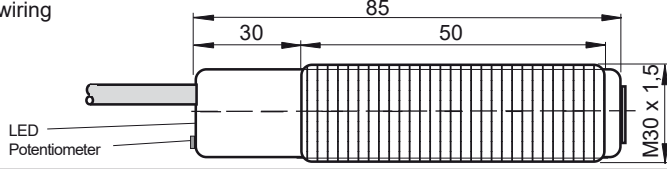


	IRS-***-FXC	IRS-***-XCI
+24VDC	1	1
0V	2	2
Output	3	3
Control out	4	4
DI	--	5
FE	yellow-green	yellow-green

IR*-*-XCI(-OP) (with optional disable input DI)**

U_{in}: 18V-28VDC, DI = +24V = disabled
 Response time: <= 200us
 Hold time: >= 7.5ms, DI = 0V = Active



Equipotential Bonding pre-scription for Ex Devices:

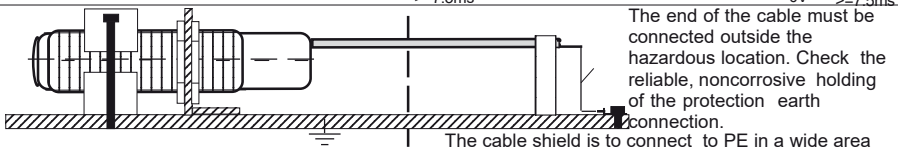

IECEX/ATEX related markings on the sensors

Device type IRD-***-OP: II 2(1)G Ex d [op is Ga] IIC T6 Gb, II 2(1)D Ex tb [op is Da] IIIC T100°C Db IP67	CE0158	Manufacturer with address
Device type IRN-***-OP: II 3G Ex nA op is IIB T4 Gc, II 3D Ex tc op is IIIA T135°C Dc IP67		
Device type IRD-***-OP: ATEX Certification		No. BVS 10 ATEX E130 X DEKRA
Device type IRD-***-OP: IECEX Certification		IECEX 14.0108X
Device type IRN-***-OP: ATEX declaration by manufacturer		according to 2014/34/EU
T _{amb} : -20°C < T _{amb} < +50°C		Electrical data according to the chart
Date of production:		Numerals 5 to 8 of the serial number (year / calendar week)

(X designation of the certification number: Fibre optics must only be used with sensors with certificated limited optical power)

Operating manual, EC-/EU-declaration of conformity:

Mounting prescriptions:

General prescriptions for all Ex devices
 It is necessary to take into consideration the valid international and national rules and regulations (EN 60079-14). The maximum input voltage U_m=30VDC must not be exceeded. The local equipotential bonding have to be done. The protective earth (PE) is solid connected with the housing. The cable have to be installed and protected against damages. The cable with termination fittings, or in cable tray systems and installed in a manner to avoid tensile stress at the termination fittings. To connect cables inside hazardous locations only use certificated Ex e housings. All cable terminals must be connected outside hazardous locations. Additional optical lenses are not allowed in hazardous locations. In dust Ex zones, do not operate the sensors without fixed dustproof sealing crew. After adjust the potentiometer, the dustproof sealing crew with undamaged packing ring, must be screwed down. Damaged or lost screws or packing rings must be replaced.
Type IRD-*-FXC/XCI-OP:** Only applicable in Ex zones 1, 2, 21, 22. The limited optical radiation can operate into hazardous locations 0 or 20 over certificated fibre optics or through a viewing glass.
Type IRN-*-FXC/XCI-OP:** Only applicable in Ex zones 2, 22. The limited optical radiation can operate into hazardous locations 1 or 21 over certificated fibre optics or through a viewing glass.
Type IRN-*-FXC-OP-S099:** Only applicable in Ex zones 2, 22. The limited optical radiation can operate into hazardous locations 1 or 21 over certificated fibre optics or through a viewing glass. Do not separate the connector when the supply voltage is connected to the cable. When installing the sensor, the safety lock device must be fitted at the cable connector. The additional adhesive warning label must be fixed to the connector housing at the connection cable. Lumberg cordsets RKTS 5-298/xx (Straight type) or RKWTH 5-298/xx (Right angle type), are allowed ONLY. It is necessary to take into consideration the mounting prescription of the connector manufacturer. In dusty locations, the protection cap for the sensor socket must be fitted, when no connection cable is connected.

General mounting prescriptions
 Do not exceed the maximum ratings. The electrical connections must be exactly as shown in the connection diagram. The cable shield must be connected short. The cable shield should be connected to the protection earth, large-surfaced. Connection cables must not be installed parallel to high voltage cables. Do not exceed the maximum ratings.
Function
 The sensor works basically as proximity switch on diffuse optical reflections. If the sensor detects reflected light, the output switches to +24VDC or 0V dependent of the polarity of the supply voltage. If the sensor works under safe conditions the LED shows green. If the sensor detects only poor reflected light, the LED shows yellow and the Control Output switches to +24VDC. If no reflected light will be recognized, the LED shows red, the outputs switches to 0V and the control-output is switching OFF. The load on the outputs must be connected to 0V.

IR*-*-XCI(-OP): Optional emitter disable input "DI"**
 If several sensors are installed close to another, it is necessary to use sensors with disable input. By using the disable input DI, each sensor can be controlled in a short reaction time (Response time: 200us). If only one sensor is activated in the same time, a mutual influence is precluded.
 DI = 0V or not connected = emitter enabled
 DI = High (24VDC) = emitter disabled
 For a correct function the sensor must be enabled for at minimum >= 7.5ms (DI=0V). If the DI input will be disabled, the outputs holds the previous output status from the last enabled time.
 The DI input is PNP compatible.
Fibre optics
 For efficiently detection solutions look for our multiple program of fibre

optics, also for high temperature areas. Fibre optics for Ex zones must only be driven by sensors series IRN and IRD.

Optical range
 The nominal range for the types IR*-05/010/015/020/030-FXC/XCI(-OP) is defined on white paper A4, 80g. The nominal range for the type IR*-030-FXC/XCI(-OP) is defined on white paper 1m², 80g. The range will be influenced by the color, kind of surface and shape of the object. Because the types IR*-030-FXC(-OP) are very sensitive, protect them against 50/60Hz extraneous light influence.
Maintenance
 Protect the sensor and the optional fibre optics against pollution. If the fibre optics or the sensor lenses are contaminated, clean with alcohol. Do not use aggressive solvents. Optical fibres can be destroyed by strong solvents. Equipment must only be repaired or serviced by the manufacturer.
General safety instructions
 Types IRN-***-FXC-OP-S099 : "WARNING - EXPLOSION HAZARD - WHEN IN HAZARDOUS LOCATIONS, TURN OFF POWER BEFORE REPLACING OR WIRING MODULES. DO NOT DISCONNECT EQUIPMENT UNLESS POWER HAS BEEN SWITCHED OFF OR THE AREA IS KNOWN TO BE NONHAZARDOUS". The mounting of the sensor in dusty locations without fixed cordset or protection cap results in a high ignition risk. The light barriers must not be used for Accident-Prevention! In worst case the output can change to any state! When installing and operating with the sensor, it is necessary to take into consideration the relevant international and other national regulations: EN 60079-14, ATEX 118a, single directive 1999/92/EC. When installing and operating with the sensor, it is necessary to take into consideration the relevant international and other national regulations: EN 60079-14, single directive 1999/92/EC.


The sensors are conform to the following standards:
 IEC/EN 60079-0:2012 + A11:2013, IEC/EN 60079-1:2007, EN 60079-15:2010, IEC/EN 60079-28:2007, IEC/EN 60079-31:2010, EN 60529:2014, EN 60950-1:2006; EN 61000-4-2 to EN 61000-4-6, EN 61000-6-1/-2, EN 61000-6-4, ATEX directive: 2014/34/EU, Machine directive: 2006/42/EC, EMC directive: 2014/30/EU, RoHS directive: 2011/65/EU.
General Notes, disposal
 We reserve the right to modify our equipment. Our equipment is designed such way, that it has the least possible adverse effect on the environment. It neither emit or contain any damaging or siliconized substances and use a minimum of energy and resources. No longer usable or irreparable units must be disposed of in accordance with local waste disposal regulations.
EC-/EU-Declaration of conformity:
 IECEX certification, types IRD: Ex d [op is Ga] IIC T6 Gb, Ex tb [op is Da] IIB T100°C Db IP67. Certification No. IECEX BVS 14.0108X.
<http://iecex.iec.ch/iecex/iecexweb.nsf/0FE79714C08BAEF8F5C1257D7E00446A9?opendocument>
 ATEX certification, types IRD: II 2(1)G Ex d [op is Ga] IIC T6 Gb, II 2(1)D Ex tb [op is Da] IIIC T100°C Db IP67. Certification No. BVS 10 ATEX E 130 X, DEKRA EXAM GmbH, Zertifizierungsstelle, Carl-Beyling-Haus, Dinendahlstrasse 9, D-44809 Bochum, ident number: 0158.
 ATEX certification, types IRN: II 3G Ex nA op is IIB T4 Gc, II 3D Ex tc op is IIIA T135°C Dc IP67. ATEX declaration by manufacturer in accordance to the ATEX directive 2014/34/EU. ATEX certification of quality type production of Ex devices in accordance to the ATEX directive 2014/34/EU, CE 1258, Eurofins. Certification No: SEV 21 ATEX 4580, QAR No. CH/SEV/QAR21.0009/00. The conformity of the devices with the EC standards and directives and the EC-type examination certificate and the observation of the Quality Safety System ISO 9001:2015 with the ATEX module "Production", declares:

IRD-***-FXC-OP-IECEX_e9/0222-02-16/MP/PLD

Tippkemper - Matrix GmbH
 Meegener Str. 43 D-51491 Overath
 Tel.: +49 2206 95666-0
 Fax -19
 info@tippkemper-matrix.com

Matrix Elektronik AG (Manufacturer)
 Kirchweg 24 CH-5420 Ehrendingen
 Tel.: +41 56 20400-20
 Fax -29
 info@matrix-elektronik.com

Dimensions: IRS-***-FXC/XCI-MT3

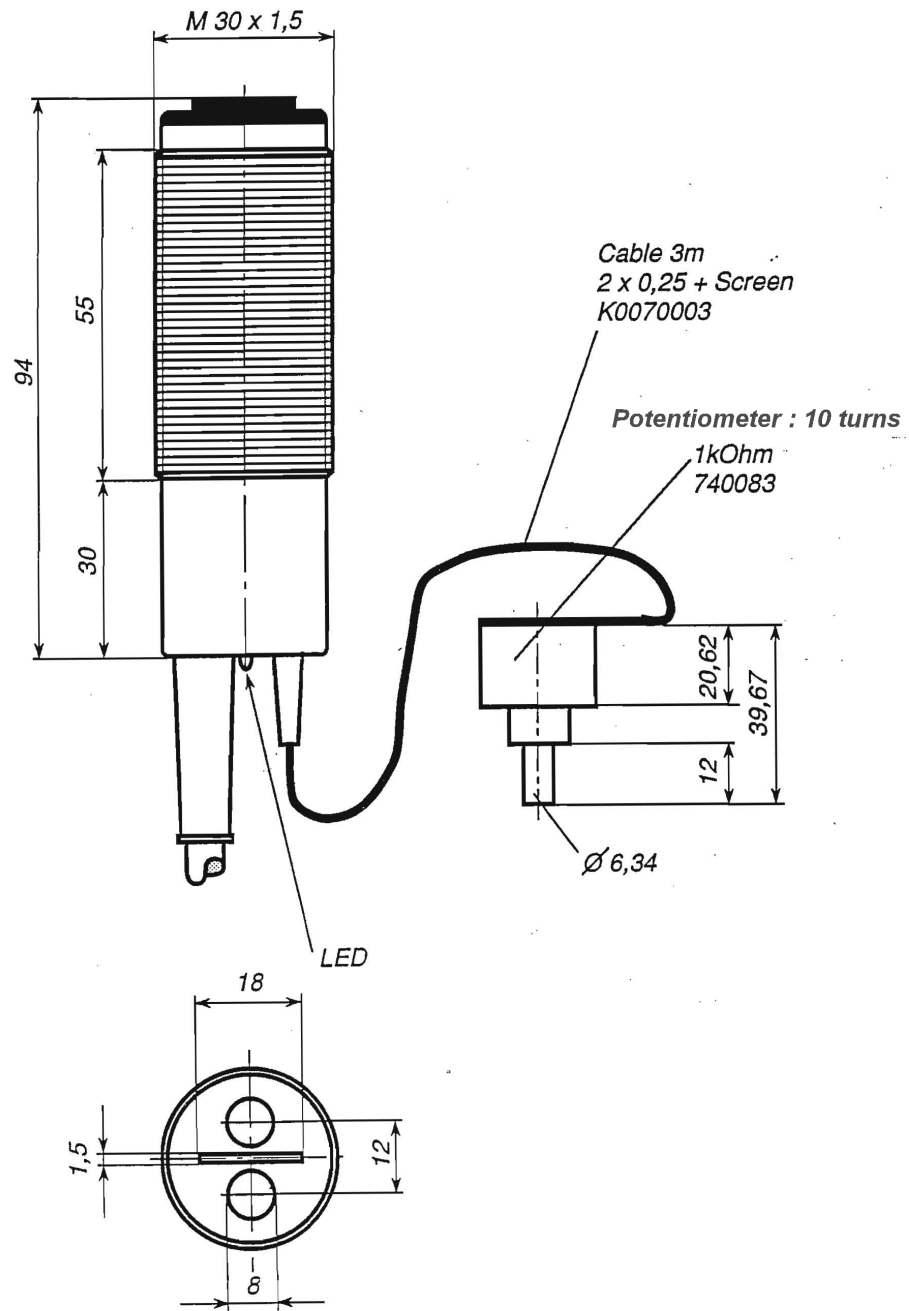

Dimensions: IRS-***-FXC/XCI-ST3

