
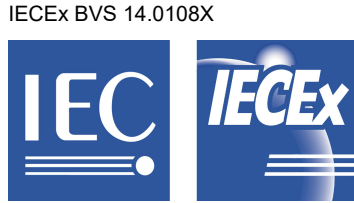


## Operating manual: ILD-108-SIR/EFP-OP Photoelectric Light Barrier



IECEX BVS 14.0108X  
Ex db [op is Ga] IIC T6 Gb  
Ex tb [op is Da] IIIC T100°C Db

- Robust light barrier for industrial applications
- Alignment aid by 3-color LED at the rear side of the receiver

CCC Explosion-proof signs:  
Ex db IIC T6 Gb  
Ex tb IIIC T100°C Db





Technical Data	Type	ILD-108-SIR/EFP-OP	
Designation		Emitter: ILD-108-SIR-OP / Receiver: ILD-108-EFP-OP	
Gas Ex protection designation		II 2(1)G Ex db [op is Ga] IIC T6 Gb	
Dust Ex protection designation		II 2(1)D Ex tb [op is Da] IIIC T100°C Db	
For use in Ex Zones		Zones (0), 1, 2, (20), 21, 22	
Light Source		Infrared 870nm	
Measuring range		80m	
Min. recognizable object size		22mm (Avoid deflections on reflective surfaces)	
Maximum optical radiant power		< 15mW	
Maximum optical radiant intensity		<=5mW/mm <sup>2</sup>	
Optical aperture angle		Emitter: approx. 8° / Receiver: approx. 12°	
Response time		5ms	
Output type		1x PNP, max. 100mA, short-circuit protected	
Pollution degree		4, according to EN 60664-1:2007	
Supply voltage, U <sub>e</sub>		24VDC ± 10%	
Absolute maximum supply voltage, U <sub>m</sub>		30VDC	
Current consumption		Emitter: 45mA / Receiver: 40mA	
Maximum power dissipation		Emitter: 1.2W / Receiver: 1.1W	
Power up delay time		500ms	
Housing		M30, brass, nickel plated	
Pollution indication output "VA"		(Optional, EV*/ET*) 1x PNP, max. 100mA, short-circuit protected	
Enclosure rating		IP67	
Ambient working temperature range, T <sub>amb</sub> (CCC)		-20°C up to +50°C	
Ambient working temperature range, T <sub>amb</sub>		-20°C up to +60°C	
Storage temperature range		-20°C up to +70°C	
Relative humidity		15% ... 80%, noncondensing	
Connection cable		TPU insulation, AWM 20236, 2/3/4+PE x 0.5mm <sup>2</sup> , halogen free, shielded, leads numbering marked, oil resistant cable for trailing, length: 10m	
Accessories	<b>Included</b>	<b>Optional</b>	
	• 4x Nuts M30 (or 2x Clamps on request)		
Options		<p>ILD-***-***-OP-S094: Special gluing of the lenses</p> <p>ILD-***-***-OP-S292: Special gluing of the lenses and potentiometer</p> <p>ILD-***-***-OP-S323: S094 + Housing M30, stainless steel 1.4404</p> <p>ILD-***-SDI-OP: With emitter-disable input (DI)</p> <p>ILD-***-***-OP-S156: Working temperature range: -30°C up to 50°C</p> <p>ILD-***-***-OP-S299: Housing made of Stainless Steel 1.4404 (316) with special nuts 1.4404</p> <p>ILD-***-***-OP-SM42: With special optics M42</p> <p>Cable length: Up to 100m, on request</p>	
Function and LED Indication	<p>Light beam interrupted LED shows red</p>	<p>Light beam not interrupted LED shows yellow or green</p>	
Output circuitry	<p>PNP=OFF R 15Ω OUT 0V</p>	<p>PNP=ON R 15Ω OUT 0V</p>	
Pollution indication output "VA"	Output VA = 0V (LED's shows red)		Output VA = 24V if LED's shows green
Alignment and Controlling by LED Display (At the rear side of the receiver).	<b>LED color</b>	<b>Meaning</b>	
	red	light beam interrupted or not aligned	
	yellow	polluted lenses or badly aligned	
	green	light beam free and well aligned	
EX related markings	<p>CE 1258</p> <p>Typ: ILD-108-SIR/EFP-OP</p> <p>Gas: II 2(1)G Ex db [op is Ga] IIC T6 Gb</p> <p>ATEX:</p> <p>IECEX:</p> <p>Tamb:</p> <p>Manufacturing date:</p>	<p>Manufacturer with Address</p> <p>Electrical data according to table</p> <p>Dust: II 2(1)D Ex tb [op is Da] IIIC T100°C Db</p> <p>BVS 10 ATEX E 130 X</p> <p>IECEX BVS 14.0108X</p> <p>-20°C up to +60°C</p> <p>Number 5 to 8 of the Serial Number (Year / CW)</p>	

ILD-108-SIR\_EFP-OP\_e6/2025-01-21/MP

CCC related markings	Typ: ILD-108-SIR/EFP-OP Gas: Ex db IIC T6 Gb CCC: Tamb: Manufacturing date:	Manufacturer with Address Electrical data according to table Dust: Ex tb IIIC T100°C Db 2021332315000876 -20°C up to +50°C Number 5 to 8 of the Serial Number (Year / CW)
----------------------	---	--

Wiring Diagram	Lead-No	ILD-108-SIR-OP	ILD-108-EFP-OP
	1	24VDC	24VDC
	2	0V	0V
	3	(Optional, SDI) DI	OUT
	4	-	(Optional, EV*/ET*) VA
	white	Cable shield	Cable shield
	yellow-green	PE	PE

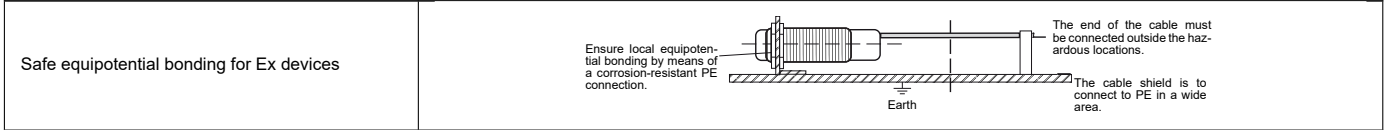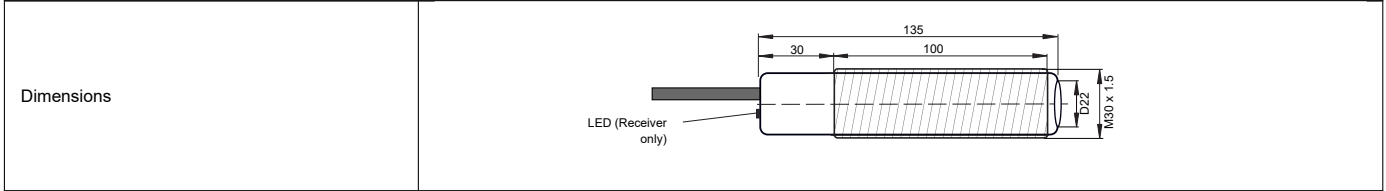

### Operating Manual / EC-/EU-declaration of conformity

#### Installation prescriptions for Ex hazardous locations

General prescriptions for all Ex devices:  
 It is necessary to take into consideration the valid international and national rules and regulations (EN 60079-14). The maximum input voltage  $U_m = 30VDC$  must not be exceeded. The local equipotential bonding have to be done. The protective earth (PE) terminal is solid connected with the housing. The cable have to be protected against damages. The cable with termination fittings, or in cable tray systems and installed in a manner to avoid tensile stress at the termination fittings. To connect cables inside hazardous locations only use certificated Ex housings. All cable terminals must be connected outside hazardous locations. Use only original manufactured fibre optics and additional optical lenses, other additional optical lenses are not allowed in hazardous locations.

ILD-108-SIR/EFP-OP: Applicable in Ex zones 1, 2, 21 and 22. The limited optical radiation can operate into hazardous locations (0) and (20).

#### General mounting prescriptions

Do not exceed the maximum ratings. The electrical connections must be exactly as shown in the connection diagram. The cable shield must be connected short. The cable shield should be connected to the protection earth, large-surfaced. Connection cables must not be installed parallel to high voltage cables. During electrical installation, the power must be disconnected from the device.

#### Type labels for china

For devices going to China, the IECEx type label must be replaced with the included CCC variant. The plant operator must ensure that all devices are labeled correctly.

#### General function

The light barriers can be used e.g. for the detection of objects (bottles, cans, etc.) on a conveyor belt. This light barrier consists of a transmitter type ILD-108-SIR-OP and a receiver type ILD-108-EFP-OP. When both the transmitter and the receiver are correctly positioned and the light beam from the transmitter is not interrupted by an object, the receiver will show green on the indicator LED (rear and/or front) and the output is switched on. If the light beam is interrupted by an object, then the indicator LED (Rear and / or Front) shows red and the output is switched off.

#### Pollution indication output "VA"

Only when the receiver LED's shows green, the pollution indication output VA switches to +24VDC. (Light barrier well aligned, no pollution or no other impairments). If the receiver LED's shows yellow or red, the output VA is switched to 0V. This function gives the possibility to a fast reaction at polluted lenses.

#### Arrangement of light barriers (IL\*...SDI-OP)

If several light barriers are installed close to another, it is necessary to use light barrier emitters with the optional disable input. By using the disable input DI, each emitter can be controlled in a short reaction time. If only one emitter is activated in the same time, a mutual influence is precluded.

DI = 0V or not connected emitter enabled  
 DI = High (24VDC) emitter disabled

The Disable Input DI must be activated for  $\geq 10ms$ . The DI input is PNP compatible. The Emitter-Disable-Input DI can also be used for testing the associated receiver. By a short-time shut-off of the emitter, the switching off of the receiver output and with it the correct function of the receiver will be checked.

#### Alignment of the Light Barrier

- Align transmitter with receiver.
- The 3-color status display at the back of the receiver enables optimum alignment of the receiver. Align receiver so that the receiver LED shows "green". Look for the center of the green area. If the LED lights up yellow, the light barrier is not optimally aligned or the lenses are dirty.

#### Maintenance

No special maintenance is required. If the lenses becomes dirty, they should be cleaned with a non-aggressive solvents. Equipment must only be repaired by the manufacturer.

#### General safety instructions

The ILD-108-SIR/EFP-OP light barriers must not be used for accident protection. In the case of a malfunction, the output can have any state. During installation, operation and maintenance, it is mandatory to meet the relevant EU and national regulations and directives, especially with regard to explosion protection: EN 60079-14, Directives 1999/92/EC and 2014/34/EU.

#### General notes, disposal

We reserve the right to modify our products. Our products are designed in such a way, that it has the least possible adverse effect on the environment. It neither emits or contains any damaging or siliconized substances and use a minimum of energy and resources. No longer usable or irreparable units must be disposed of in accordance with local waste disposal regulations.

#### Special usage conditions

The widths and gaps of the flameproof joints of this apparatus are not identical with the respective minimum or maximum values required by Table 2 and 3 of IEC 60079-1:2014. Information on the dimensions are to be obtained from the manufacturer. Access to the enclosure is prevented by adhesion. Repair works of the enclosure and thus of the parts forming the flameproof joint can only be carried out by the manufacturer. The instructions contain relevant hints.

#### CCC-Declaration of Conformity

The product meets the requirements of the following standards: GB/T3836.1-2021, GB/T3836.2-2021 and GB/T3836.3-2021

#### CCC Designation:

Gas: Ex db IIC T6 Gb  
 Dust: Ex tb IIIC T100°C Db  
 CCC Certification No.: 2021332315000876  
 Ex CB CCC: PCEC, No. 85 No.3 Road Ding Zi Gu, Tianjin, 300131, China

#### EU-Declaration of Conformity

The product meets the requirements of the following standards and directives: EN IEC 60079-0:2018, IEC 60079-1:2014, IEC 60079-15:2010, IEC 60079-28:2015, IEC 60079-31:2013, EN 60529:2014, EN 61000-4-2 to EN 61000-4-6, EN 61000-6-1/2, EN 61000-6-4, ATEX directive 2014/34/EU, Machine directive 2006/42/EC, EMC directive 2014/30/EU, RoHS directive 2011/65/EU ATEX/IECEX-Designation:

Gas: II 2(1)G Ex db [op is Ga] IIC T6 Gb  
 Dust: II 2(1)D Ex tb [op is Da] IIIC T100°C Db  
 ATEX EU-type examination certificate No.: BVS 10 ATEX E 130 X  
 IECEX CoC No.: IECEX BVS 14.0108X  
 Ex CB IECEX: DEKRA Testing and Certification GmbH, Carl-Beyling-Haus, Dinendahlstrasse 9,

D-44809 Bochum, Ident number: 0158.  
 ATEX certification of quality management system, type production of Ex devices, in accordance to the directive 2014/34/EU:

Certification No.: SEV 21 ATEX 4580, QAR No.: CH/SEV/QAR21.0009, CB: Eurofins Electric & Electronic Product Testing AG, Luppenstrasse 3, CH-8320 Fehraltorf CE 1258.

Pablo Ledergerber, Matrix Elektronik AG, is authorized to generation of documentation. The conformity of the devices with all used standards and directives and the EC-type examination certificate and the observation of the Quality Management System ISO 9001:2015, declares:

Ehrendingen, 21.1.2025

Pablo Ledergerber, Matrix Elektronik AG

ILD-108-SIR\_EFP-OP\_e6/2025-01-21/MP

Tippkemper-Matrix GmbH  
 Meegerer Str. 43, D-51491 Overath  
 Tel.: +49 2206 9566-0, Fax -19  
 info@tippkemper-matrix.de

Matrix Elektronik AG (Manufacturer)  
 Kirchweg 24, CH-5420 Ehrendingen  
 Tel.: +41 56 20400-20, Fax -29  
 info@matrix-elektronik.com