

QWV-1500-23-L-50-OP3-S093 Cross-section converter fibre optics




• Applicable for width measurement, detection of small objects and other applications



Technical Data	QWV-1500-23-L-50-OP3-S093
Gas Ex protection designation	II 1G op is IIC T2 Ga
Dust Ex protection designation	II 1D op is IIIC T300°C Da
For use in Ex Zones	0 and 20
Permitted sensors	Only for operating with ATEX/IECEx certified sensors from Matrix Elektronik AG
Detection width	50mm
Maximum optical input power	<= 35mW
Maximum optical input intensity	<= 5mW/mm ²
Total length	1500mm, other dimensions on request
Active fibre optic diameter	Emitter: 2mm / Receiver: 3mm
Active cross-sectional area	Emitter: 3.14mm ² / Receiver: 7.07mm ²
Single fiber diameter	50um
Average transmission	50-70% at 880nm
Optical acceptance angle	approx. 65° at 880nm
Minimum bending radius	50mm (Single bend)
Materials	Adapter & sensing heads: Stainless steel, V2A Protective sleeve: Flexible stainless steel, V2A
Enclosure rating	IP68
Ambient working temperature range, T _{amb}	0°C up to +120°C

Dimensions

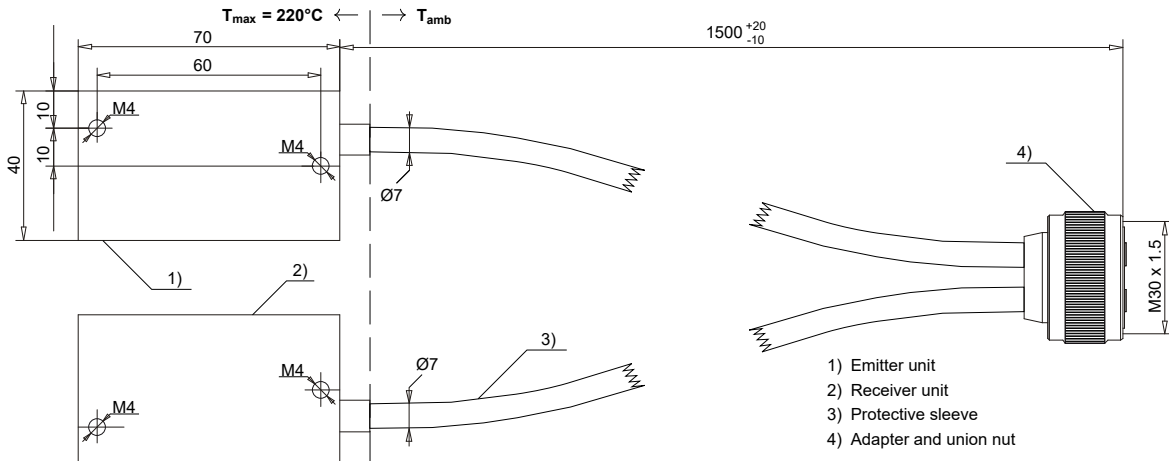

EX related markings

CE 1258
 Gas: II 1G op is IIC T2 Ga
 ATEX:
 IECEx:
 Tamb: 0°C up to +120°C
 (X designation of the certification number: Fibre optics must only be applied with sensors with certificated limited optical power).

Manufacturing date: Digits 5 to 8 of the serial number (Year / CW)
 Dust: II 1D op is IIIC T300°C Da
 BVS 10 ATEX E 130 X
 IECEx BVS 14.0108X
 Manufacturer with address

Operating Manual / EU-declaration of conformity

Ex installation prescriptions

It is necessary to take into consideration the valid international and national rules and regulations (IEC 60079-14). The optical fibre must only be operated with ATEX/IECEx homologated sensors from Matrix Elektronik AG. The maximum rated optical input power must not be exceeded. The local equipotential bonding have to be done by grounding the fixed sensor. Other than original manufacturer, additional optical lenses are not allowed in hazardous locations. The fibre optics have to be installed in a manner that avoids tensile stress and frictional heat. If fibre optics and associated sensors are not mounted in the same hazardous location, the change over of the different areas must be realized in accordance with the valid regulations. The product QWV-1500-23-L-50-OP3-S093 is applicable in Ex zones 0 and 20.

Function

The optical fibre type QWV together with sensors of type IRD-002-A**-OP-S093, gives the possibility to realize precision line scanning or width measurement of different objects.

General safety

When installing and operating the product, it is necessary to take into consideration all relevant international and other national regulations, especially those regarding explosion protection.

Maintenance

No special maintenance is required. Protect the product and any optical ports (if applicable) from pollution. Clean with **non-aggressive** solvents only. Strong solvents may damage certain fibre optics. The equipment must only be repaired or serviced by the manufacturer.

General notes and disposal

We reserve the right to modify our products. Our products are designed in such a way, that it has the least possible adverse effect on the environment. It neither emits or contains any damaging or siliconized substances and use a minimum of energy and resources. No longer usable or irreparable units must be disposed of in accordance with local waste disposal regulations.

EU-Declaration of Conformity

The product meets the requirements of the following standards and directives:
 EN IEC 60079-0:2018, IEC 60079-28:2015, IEC 60079-31:2013, ATEX directive 2014/34/EU, Machine directive 2006/42/EC, RoHS directive 2011/65/EU

ATEX/IECEx-Designation:

Gas: II 1G op is IIC T2 Ga
 Dust: II 1D op is IIIC T300°C Da
 ATEX EU-type examination certificate No.: BVS 10 ATEX E 130 X
 IECEx CoC No.: IECEx BVS 14.0108X
 Ex CB IECEx: DEKRA Testing and Certification GmbH, Carl-Beyling-Haus, Dinen-dahlstrasse 9, D-44809 Bochum.

ATEX certification of quality management system, type production of Ex devices, in accordance to the directive 2014/34/EU:

Certification No.: SEV 21 ATEX 4580, QAR No.: CH/SEV/QAR21.0009, CB: Eurofins Elec-tric & Electronic Product Testing AG, Luppenstrasse 3, CH-8320 Fehraltorf CE 1258 Ident. Number: 1258

Pablo Ledergerber, Matrix Elektronik AG, is authorized to generation of documentation. The conformity of the devices with all used standards, directives and EC-type examination certificates and the observation of the Quality Management System ISO 9001:2015, declares:

Ehrendingen, 31.3.2025

Pablo Ledergerber, Matrix Elektronik AG

QWV-1500-23-L-50-OP3-S093_e3/2025-03-31/MP

Tippkemper-Matrix GmbH
 Meegerner Str. 43, D-51491 Overath
 Tel.: +49 2206 9566-0, Fax -19
 info@tippkemper-matrix.de

Matrix Elektronik AG (Manufacturer)
 Kirchweg 24, CH-5420 Ehrendingen
 Tel.: +41 56 20400-20, Fax -29
 info@matrix-elektronik.com