
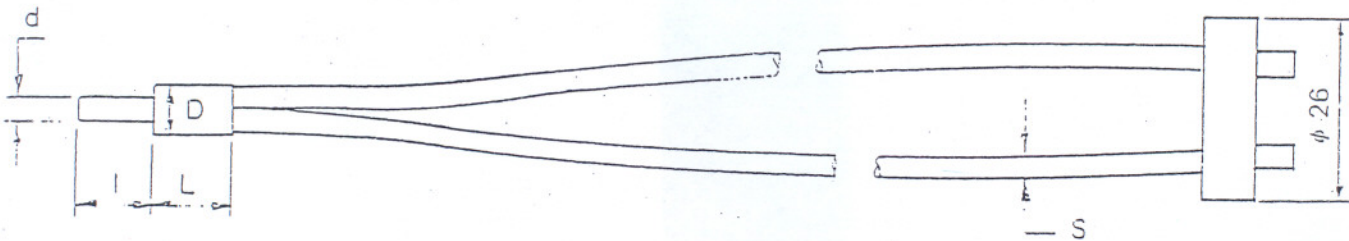



LICHTLEITER

Low Cost mit PVC-Schutzschlauch bis 70° C

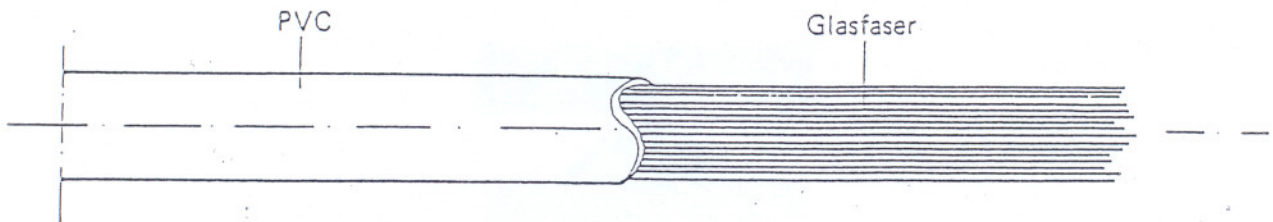

Abmessungen in mm

Typ	Länge	Faser-φ	D	d	L	l	S
YC 500/1	500	1,1	6	3	15	10	2,3
YC 1000/1	1000	1,1	6	3	15	10	2,3
YC 2000/1	2000	1,1	6	3	15	10	2,3
YC 500/2	500	2,2	7	4	15	10	4,0
YC 1000/2	1000	2,2	7	4	15	10	4,0
YC 2000/2	2000	2,2	7	4	15	10	4,0

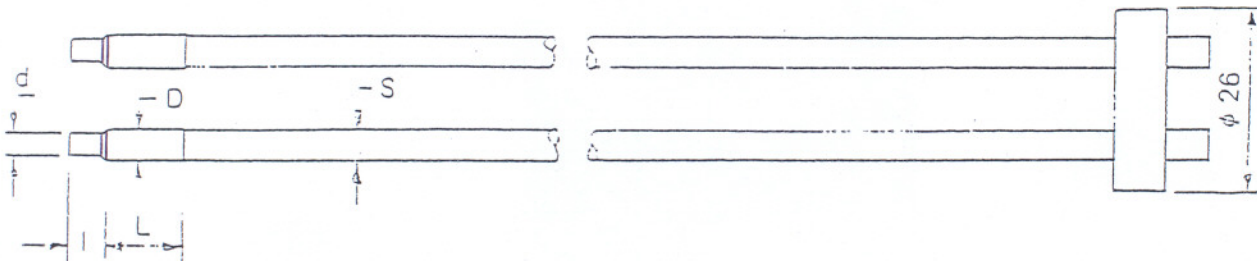

Abmessungen in mm

Typ	Länge	Faser-φ	D	d	L	l	S
LLC 500/1	500	1,1	2,7	1,8	15	5	2,3
LLC 1000/1	1000	1,1	2,7	1,8	15	5	2,3
LLC 2000/1	2000	1,1	2,7	1,8	15	5	2,3
LLC 500/2	500	2,2	4,2	3,0	15	5	4,0
LLC 1000/2	1000	2,2	4,2	3,0	15	5	4,0
LLC 2000/2	2000	2,2	4,2	3,0	15	5	4,0