

JH-M30-4: Adjustable mount for M30 sensors

JH-M18-4: Adjustable mount for M18 sensors

Description:


Adjustable mount for M30 or M18 sensors. Precision threads allow a horizontal and vertical adjustment of $\pm 4^\circ$ and a lock prevents accidental displacement. The robust construction with a stainless steel frame allows holding also sensors with large optics.

Mounting:

Screw down the steel frame horizontally or vertically. Some examples of mounting are shown in the figure on the right. Fix the sensor with the two nuts supplied with the sensor.

Usage:


Loosen the locking screw A. Turning adjustment screw J1 moves the beam vertically and adjustment screw J2 horizontally. Tightening screw A fixes the current position. This prevents changes in position due to shaking or because of the unintentional touching of the adjusting screws. In order not to damage the adjustment screws, tighten screw A with measure. The correct strength is achieved when the adjustment screws could be rotated only applying a considerable force.

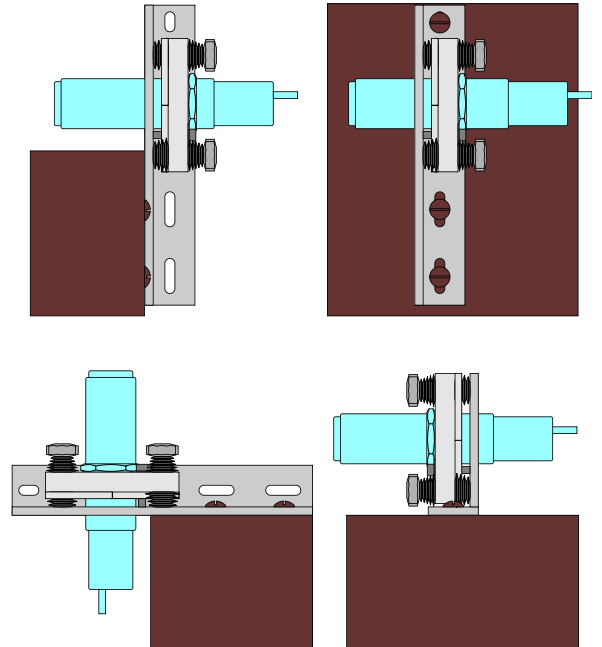

Dimensions in mm (scale 1:2):

JH-M30-4: $\varnothing D = 30$ mm

JH-M18-4: $\varnothing D = 18$ mm

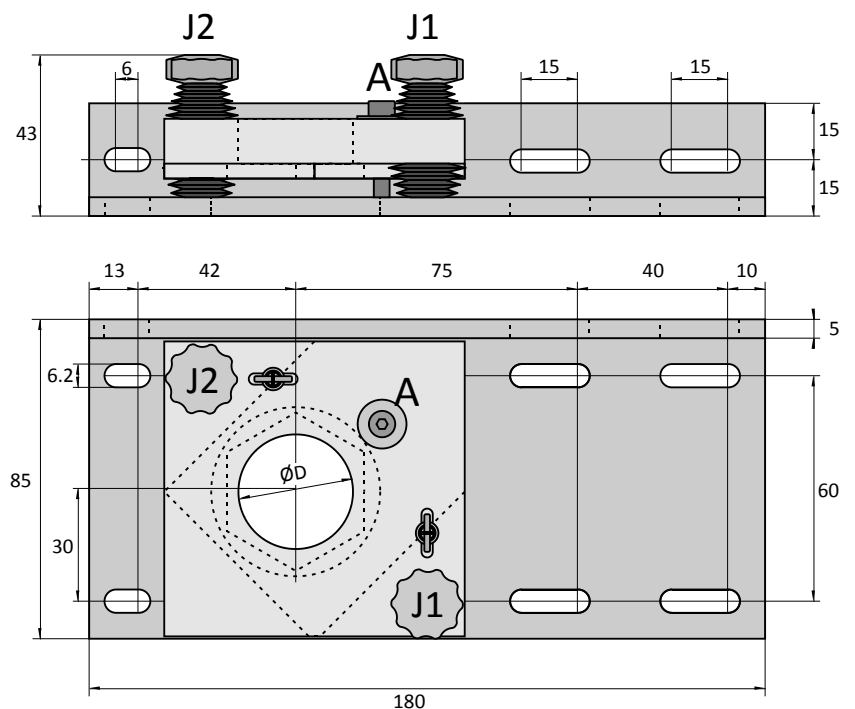

JH-Mxx-4_e4.docx/2014-02-11/DH